

INSTALLATION & MAINTENANCE

Using technologically advanced manufacturing processes we are able to bring North Americans a product that is both user friendly and attractive. Our TIGHT-FIT™ is easy to install and maintain - regular sweeping or vacuuming and an occasional damp mopping with warm water is all that is required.



GARIBALDI SUMMIT

ECO-FRIENDLY

Our products are created using up to 50% recycled vinyl. All returned products and samples are sent to Korea where they are recycled into new material. XL Flooring is a member of the Canada Green Building Council (CaGBC).

INDOOR AIR QUALITY (IAQ) REQUIREMENTS

All of our products have been tested and certified by SCS Global Services. By meeting the FloorScore requirements set forth by SCS, our products meet the most stringent guidelines for indoor air quality.



LONSDALE

NATURAL LOOKING FLOORS

We use cutting edge print technology to deliver the gorgeous natural look of a wood plank and tile. The high definition print layer creates a floor so realistic, you have to touch it to believe it!

Our beautiful colours make it easy for you to select the right floor for any application, whether for your home, office, school, store or restaurant.



DURABLE & HYGIENIC

High quality recycled vinyl is used to provide strength and flexibility and a fiberglass sheet is embedded into the plank core for dimensional stability. At the base of the product, we've built in a sound-absorbing backing that provides super grip and extra comfort. Above the decor layer, a 0.5mm (20mil) wear layer is coated on to resist scratches, dirt and other everyday wear. Then, a poly-urethane, UV cured embossing is applied to seal and guard your floor. Our special embossing contains millions of micro-beads of ceramic and an "Ecoprotec" coating to ensure your floor is easy to maintain and will resist bacterial growth.

SMOOTH & CONTEMPORARY

Our luxury vinyl tile collections were designed with modernity in mind. With hand-picked colours from designers across North America, we offer beautiful planks and tiles that are guaranteed to add a touch of class to any home or commercial space.

APPLICATION

DROP & DONE, TILE & DONE and FLEXIPLANK can be installed TIGHT-FIT™ in any application, whether residential or commercial with minimal preparation required.

PERFORMANCE

The exceptional overall thickness of 5.0 mm provides comfort, stability and excellent noise reduction through our sound absorbing backing.

The fiberglass core ensures that our products will remain stable whether it is installed TIGHT-FIT™, perimeter-glued or full-spread glued.

PATTERNS & SURFACES

Colours and patterns have high definition and clarity thanks to the "Ice Blue" 0.5 mm wear-layer and permanent embossing embedded with micro-beads of ceramic and our anti-microbial finish.

ENVIRONMENT


Removable, replaceable, reusable, and recyclable, our products can contribute points to LEED certified projects and meet the strict indoor air quality (IAQ) requirements of FloorScore.

XL Flooring is a "Cradle to Cradle" business with an essentially waste-free production.

AVAILABILITY

Product is stocked across Canada, parts of the United States and is available in most flooring stores.

DROP & DONE TILE & DONE AND FLEXIPLANK MULTI-LAYER STRUCTURE

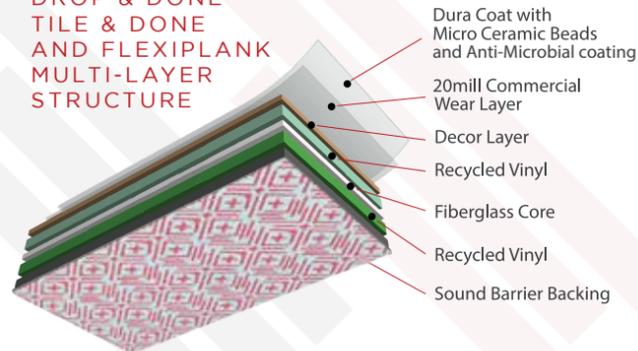

Dura Coat with Micro Ceramic Beads and Anti-Microbial coating
20mil Commercial Wear Layer
Decor Layer
Recycled Vinyl
Fiberglass Core
Recycled Vinyl
Sound Barrier Backing



EXCELLENCE IN FLOORING



WATERPROOF



STAIN RESISTANT



INSTALLATION



RECYCLED MATERIALS



LIMITED WARRANTY



LIMITED WARRANTY

IMPORTED FROM KOREA
DISTRIBUTED BY XL FLOORING CO LTD

WWW.XLFLOORING.CA

604 988 0091

604 988 0092

1 877 434 7351 (CANADA)

1 855 847 3886 (USA)

contact@xlflooring.ca

#117-3721 Delbrook Ave.
North Vancouver, BC V7N 3Z4



© 2016 XL Flooring Co. Ltd. All rights reserved.
Drop & Done™ and Flexiplank™ are registered trademarks of XL Flooring Co. Ltd.
Errors and omissions excepted (E&OE)



XLBR001



XL FLOORING



ORIGINAL TIGHT-FIT™ LUXURY VINYL PLANKS

Drop & Done
FLOORING

flexi
plank

Tile & Done
FLOORING

WWW.XLFLOORING.CA

Drop & Done FLOORING



BALI MERBAU



NORDIC



MILL CHOICE



BAJA



EASTERN TOWNSHIP



MILL RUN




TENNESSEE BLUEGRASS



CATALINA



GARIBALDI SLOPE



SMOKY MOUNTAINS



SILVER RIDGE



FRASER BANKS



GEORGIA WALNUT

Tile & Done FLOORING



BLACK PEARL



ERAMOSA STONE



GARIBALDI SUMMIT



LONSDALE



GIANT'S CAUSEWAY



INCA TRAIL



MARBLE ARCH



JASPER PARK




KITSILANO



RIALTO BRIDGE



SAND DUNE



STONEHENGE

Drop & Done FLOORING TECHNICAL INFORMATION

MATERIALS:	Virgin and recycled vinyl with a fiberglass core
DIMENSIONS:	6" x 48" planks
THICKNESS:	5.0 mm (3/16")
WEAR LAYER:	0.5 mm (20mil)
PROFILE:	Non-Beveled
SQ.FT. PER CARTON:	20
PLANKS PER CARTON:	10
WEIGHT PER CARTON:	34 lbs. planks
APPLICATION:	Commercial / Residential
WARRANTY:	15 yr. Commercial / Lifetime Residential
INSTALLATION:	Can be installed over any flat and dry surface - concrete, tile, lino, hardwood and plywood. Suitable to use with underfloor heating
SURFACE TREATMENT:	High density UV baked polyurethane coating with micro-ceramic wear layer and anti-microbial treatment
SOUND ABSORPTION:	IIC 54 (Meets Canada and US building code requirements)
MAINTENANCE:	Sweep, dust mop or vacuum thoroughly. Damp mop using any PH neutral cleaner designed for vinyl flooring
EMISSIONS:	TVOC after 28 days: 0.005 SVOC after 28 days: 0.005 Phenol after 28 days: Zero

Tile & Done FLOORING TECHNICAL INFORMATION

MATERIALS:	Virgin and recycled vinyl with a fiberglass core
DIMENSIONS:	12" x 24" tiles
THICKNESS:	5.0 mm (3/16")
WEAR LAYER:	0.5 mm (20mil)
PROFILE:	Non-Beveled
SQ.FT. PER CARTON:	20
TILES PER CARTON:	10
WEIGHT PER CARTON:	36.4 lbs.
APPLICATION:	Commercial / Residential
WARRANTY:	15 yr. Commercial / Lifetime Residential
INSTALLATION:	Can be installed over flat surfaces - concrete, tile, lino, hardwood and plywood. Can be used with underfloor heating. For aesthetic purposes a pre-mixed acrylic grout can be applied between tiles.
SURFACE TREATMENT:	High density UV baked polyurethane coating with micro-ceramic wear layer and anti-microbial treatment
SOUND ABSORPTION:	IIC 54 (Meets Canada and US building code requirements)
MAINTENANCE:	Sweep, dust mop or vacuum thoroughly. Damp mop using any PH neutral cleaner designed for vinyl flooring.
EMISSIONS:	TVOC after 28 days: 0.005 SVOC after 28 days: 0.005 Phenol after 28 days: Zero



TECHNICAL INFORMATION

MATERIALS:	Virgin and recycled vinyl with a fiberglass core
DIMENSIONS:	7" x 48" planks
THICKNESS:	5.0 mm (3/16")
WEAR LAYER:	0.5 mm (20mil)
PROFILE:	Non-Beveled
SQ.FT. PER CARTON:	23.3
PLANKS PER CARTON:	10
WEIGHT PER CARTON:	42.8 lbs.
APPLICATION:	Commercial / Residential
WARRANTY:	15 yr. Commercial Lifetime Residential
INSTALLATION:	Can be installed over any flat and dry surface - concrete, tile, lino, hardwood and plywood. Suitable to use with underfloor heating
SURFACE TREATMENT:	High density UV baked polyurethane coating with micro-ceramic wear layer and anti-microbial treatment
SOUND ABSORPTION:	IIC 54 (Meets Canada and US building code requirements)
MAINTENANCE:	Sweep, dust mop or vacuum thoroughly. Damp mop using any PH neutral cleaner designed for vinyl flooring
EMISSIONS:	TVOC after 28 days: 0.005 SVOC after 28 days: 0.005 Phenol after 28 days: Zero

All product pictures shown herein are intended for reference purposes only. Actual purchased flooring may vary in appearance.



AGED CASTLE



BRISTOL BEACH



GOLDEN PRAIRIE



PAINTER'S CHOICE



PEWTER MOON




SANDED GREY




SAVANNAH BAY



TAHITIAN HUT

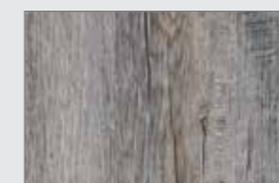

WEST SIDE SUNSET

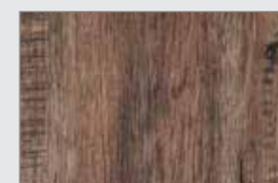

WESTERN PURSUIT



ZANZIBAR

FOR NEW PRODUCTS & UPDATES PLEASE VISIT

WWW.XLFFLOORING.CA